


碳陶刹车盘选型手册

Carbon/Ceramics BrakeDisc Selection Manual

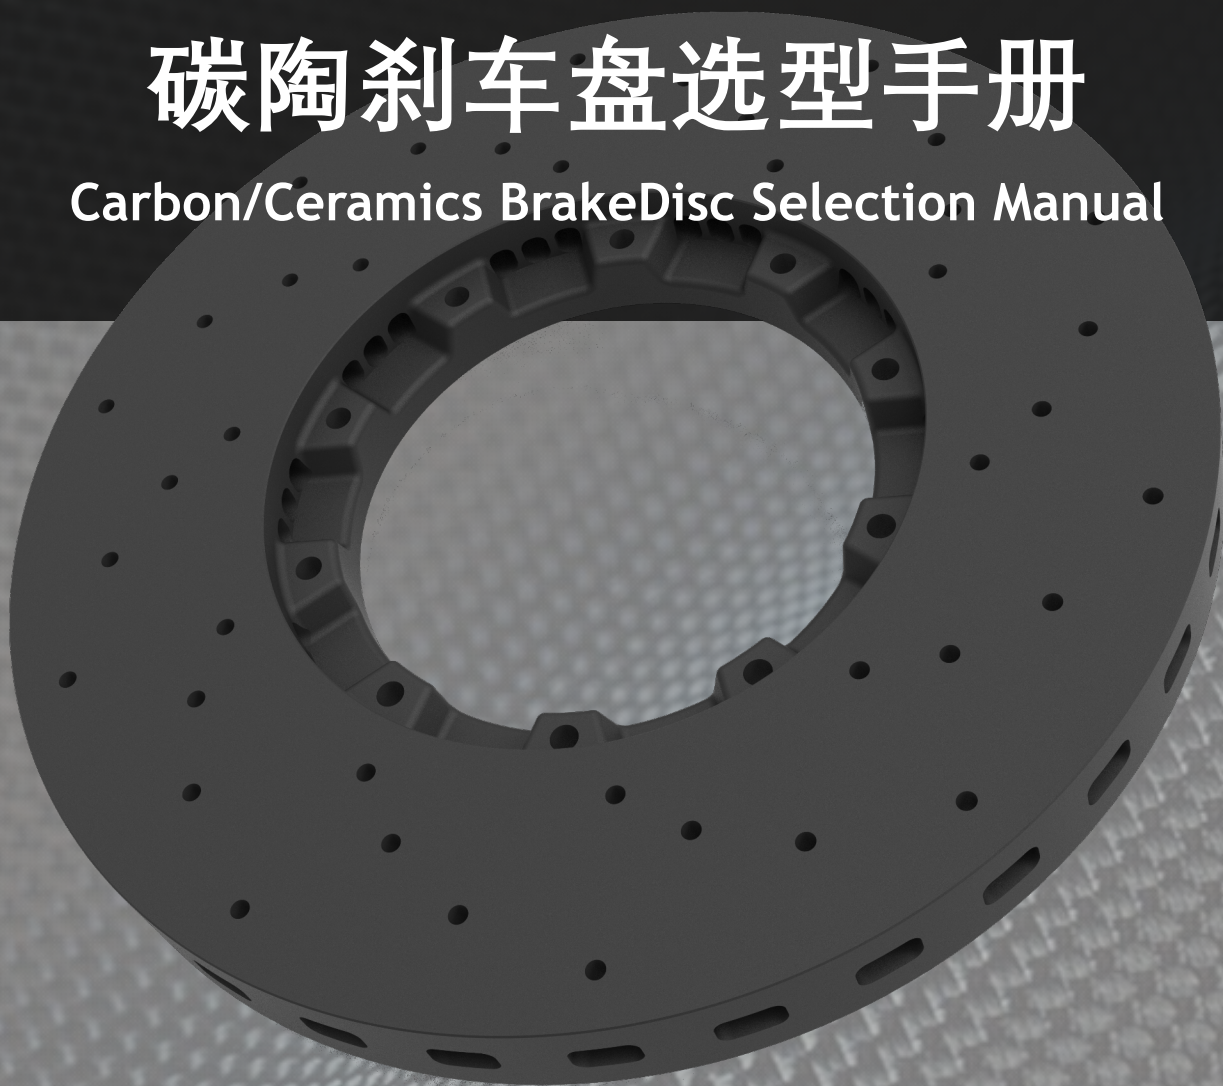

KING CARBON
composites
理想 / 创新 / 远见

目录

Content

35x系列刹车盘 (直径350mm&355mm) - - - - - page 01

35x Series brake discs (diameter 350mm&355mm) - - - - - page 01

36x系列刹车盘 (直径360mm) - - - - - page 02

36x Series brake discs (diameter 360mm) - - - - - page 02

37x系列刹车盘 (直径370mm&378mm) - - - - - page 03

37x Series brake discs (diameter 370mm&378mm) - - - - - page 03

38x系列刹车盘 (直径380mm) - - - - - page 04

38x Series brake discs (diameter 380mm) - - - - - page 04

39x系列刹车盘 (直径390mm&393mm) - - - - - page 05

39x Series brake discs (diameter 390mm&393mm) - - - - - page 05

40x系列刹车盘 (直径400mm&405mm) - - - - - page 06

40x Series brake discs (diameter 400mm&405mm) - - - - - page 06

41x系列刹车盘 (直径410mm) - - - - - page 07

41x Series brake discs (diameter 410mm) - - - - - page 07

42x系列刹车盘 (直径420mm) - - - - - page 08

38x Series brake discs (diameter 420mm) - - - - - page 08

44x系列刹车盘 (直径440mm) - - - - - page 09




38x Series brake discs (diameter 440mm) - - - - - page 09

总览- - - - - page 10

Overview - - - - - page 10






35x系列制动盘

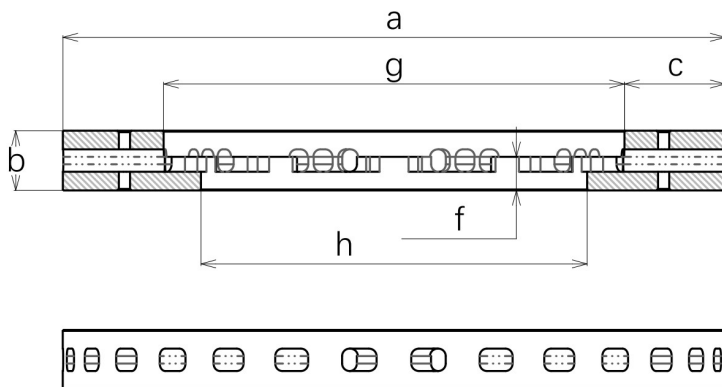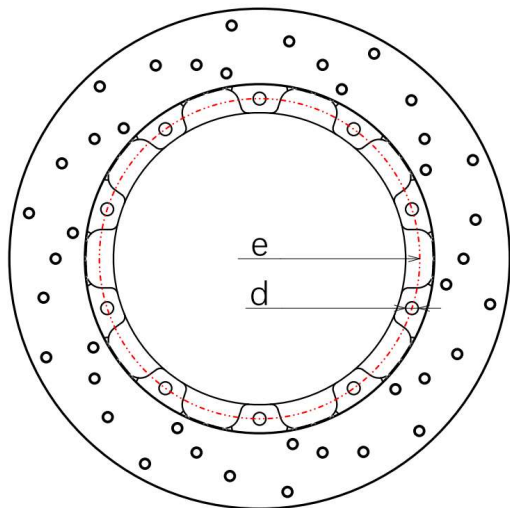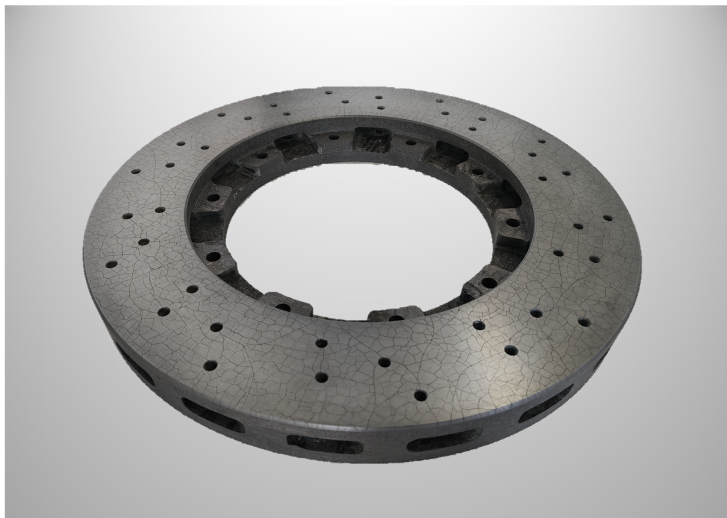

产品型号 products	外径 a (mm)	厚度 b (mm)	刹宽 c (mm)	装配孔直径 d (mm)	节圆直径 e (mm)	台阶厚度 f (mm)	摩擦面内径 g (mm)	盘体内径 h (mm)	参考重量 (kg)
350X32D65	350	32	65	9	200	18	220	180	3.82
355X28D54	355	28	54	9	227	18	247	207	3.15
355X32D54	355	32	54	9	227	18	247	207	3.44
355X32D62	355	32	62	9	211	18	231	191	3.78
355X32D67	355	32	67	9	201	18	221	181	3.97






36x系列制动盘

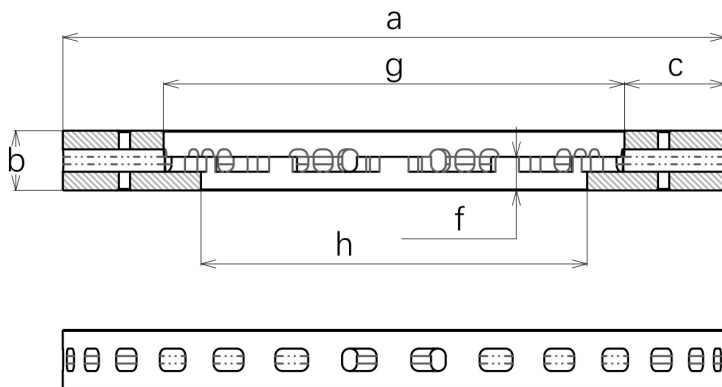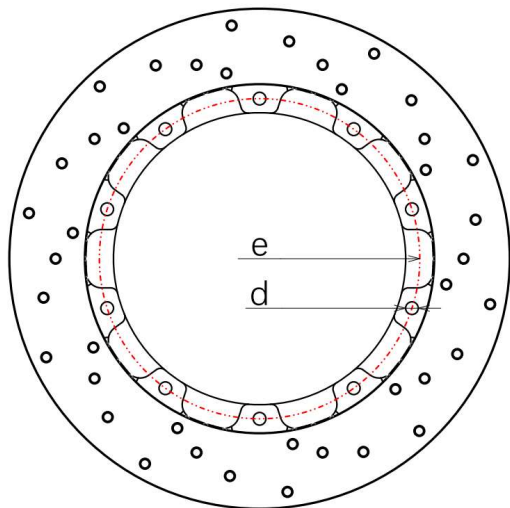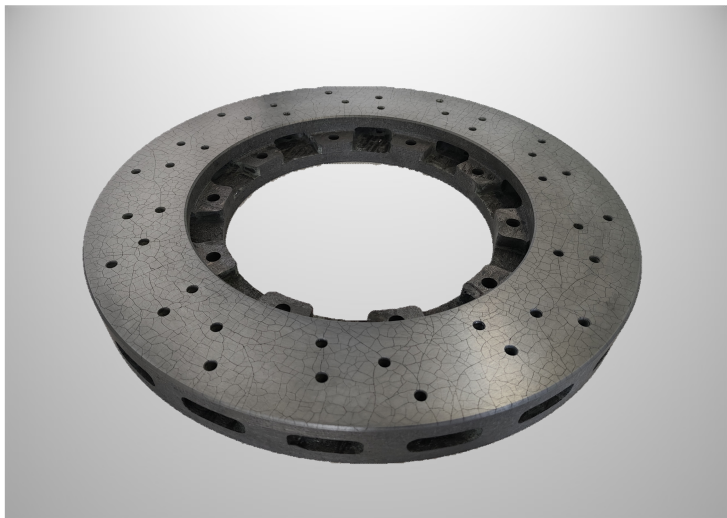

产品型号 products	外径 a (mm)	厚度 b (mm)	刹宽 c (mm)	装配孔直径 d (mm)	节圆直径 e (mm)	台阶厚度 f (mm)	摩擦面内径 g (mm)	盘体内径 h (mm)	参考重量 (kg)
360X26D55	360	26	55	9	230	18	250	210	2.98
360X26D69	360	26	69	9	202	18	222	182	3.45
360X32D64	360	32	64	9	212	18	232	192	3.92






37x系列制动盘

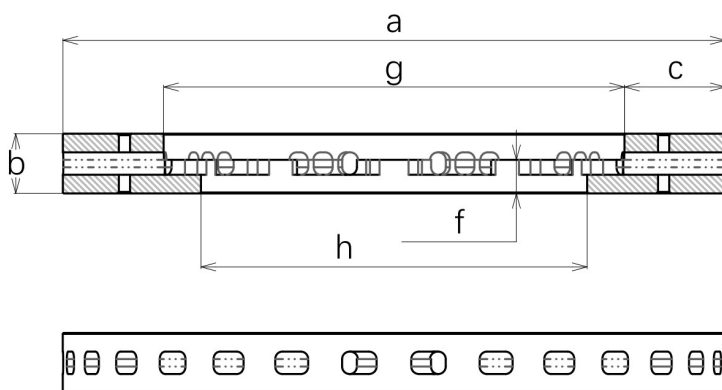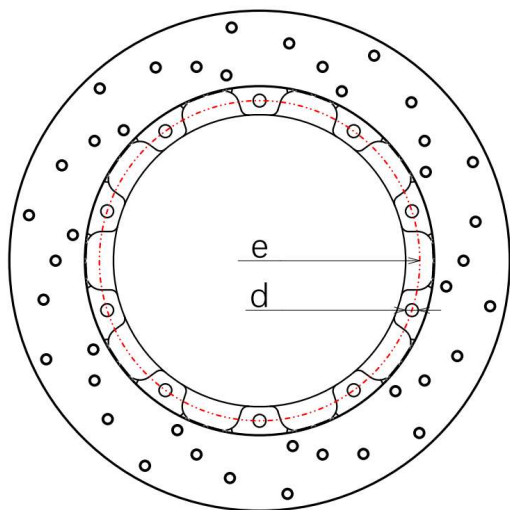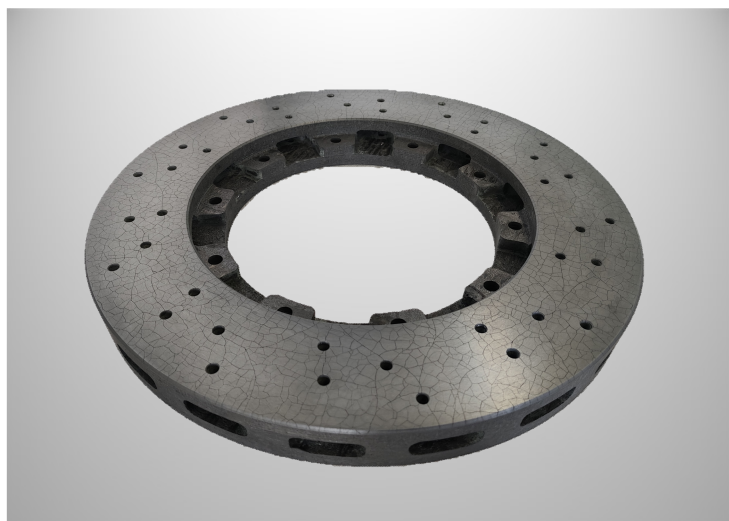

产品型号 products	外径 a (mm)	厚度 b (mm)	刹宽 c (mm)	装配孔直径 d (mm)	节圆直径 e (mm)	台阶厚度 f (mm)	摩擦面内径 g (mm)	盘体内径 h (mm)	参考重量 (kg)
37024B	370	24	68	9	214	17	234	194	3.30
37030A	370	30	72	9	206	18	226	186	4.22
37836A	378	36	56	9	246	23	266	226	4.41




38x系列制动盘

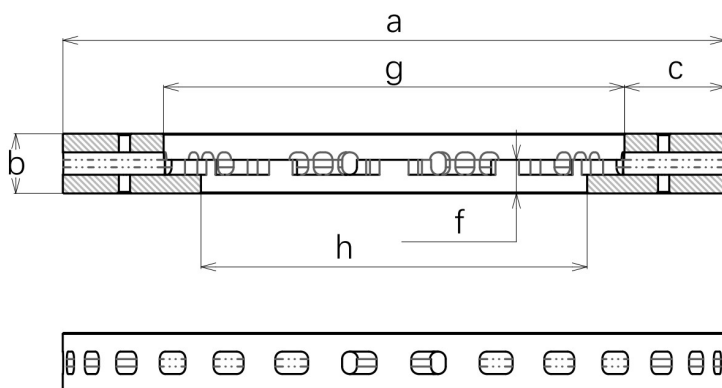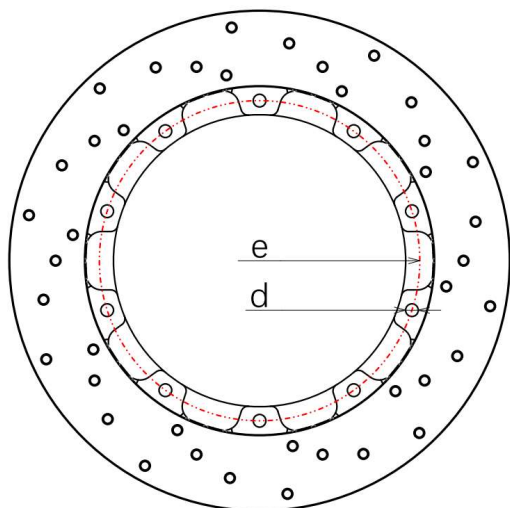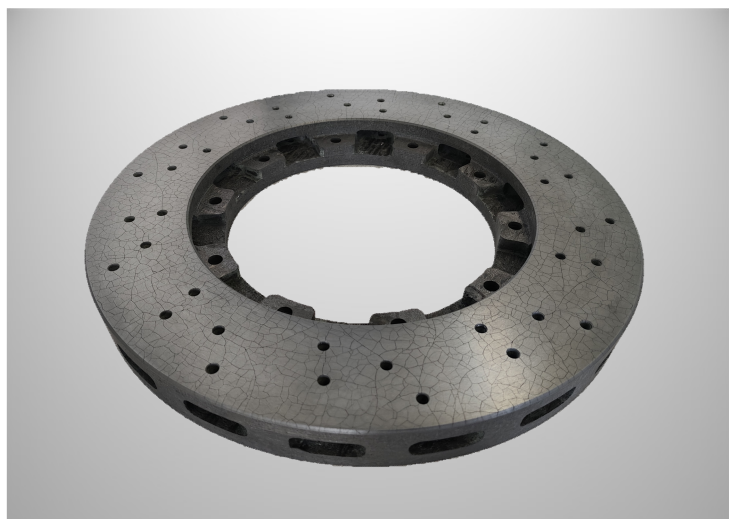

产品型号 products	外径 a (mm)	厚度 b (mm)	刹宽 c (mm)	装配孔直径 d (mm)	节圆直径 e (mm)	台阶厚度 f (mm)	摩擦面内径 g (mm)	盘体内径 h (mm)	参考重量 (kg)
380X28D54	380	28	54	9	252	18	272	232	3.40
380X28D57	380	28	57	9	246	18	266	226	3.53
380X28D61	380	28	61	9	238	18	258	218	0.00
380X28D68	380	28	68	9	224	18	244	204	0.00
380X30D60	380	30	60	9	240	18	260	220	3.87
380X32D56	380	32	56	9	248	18	268	228	3.83
380X34D64	380	34	64	9	232	23	252	212	0.00
380X34D72	380	34	72	9	216	23	236	196	4.93
380X34D80	380	34	80	9	202	23	220	180	0.00
380X36D72	380	36	72	9	216	23	236	196	5.24
380X36D80	380	36	80	9	200	23	220	180	0.00






39x系列制动盘

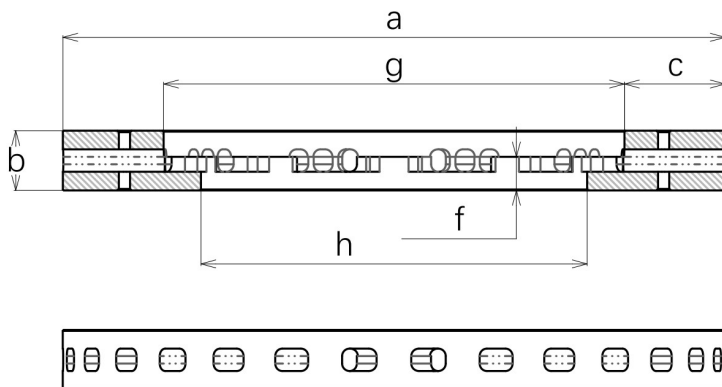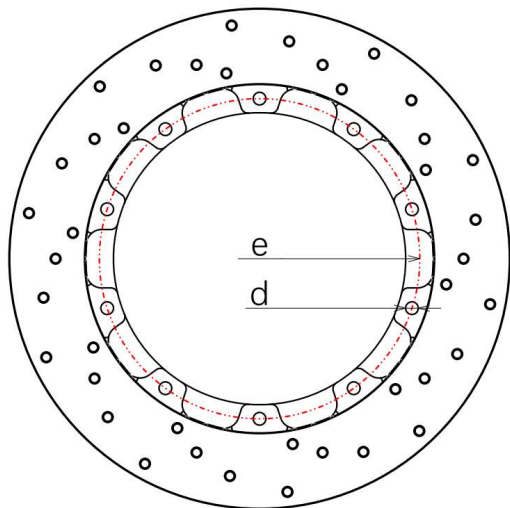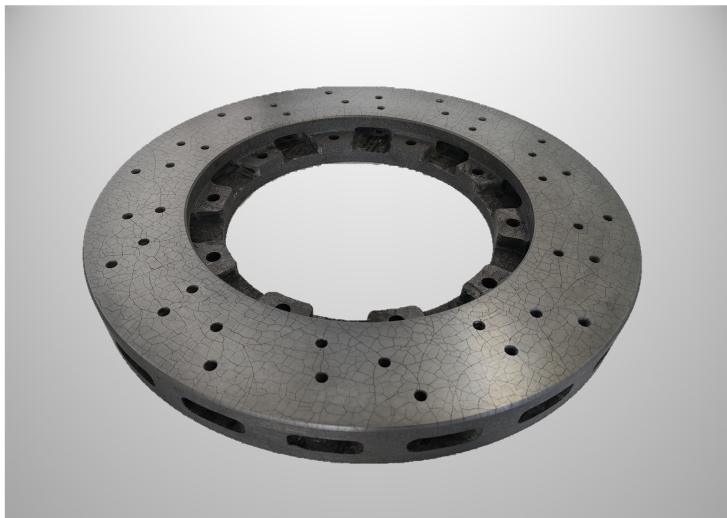

产品型号 Products	外径 a (mm)	厚度 b (mm)	刹宽 c (mm)	装配孔直径 d (mm)	节圆直径 e (mm)	台阶厚度 f (mm)	摩擦面内径 g (mm)	盘体内径 h (mm)	参考重量 (kg)
390X32D68	390	32	68	9	234	18	254	214	4.51
390X36D72	390	36	72	9	226	23	246	206	5.43
393X36D88	393	36	88	9	197	23	217	177	6.21






40x系列制动盘

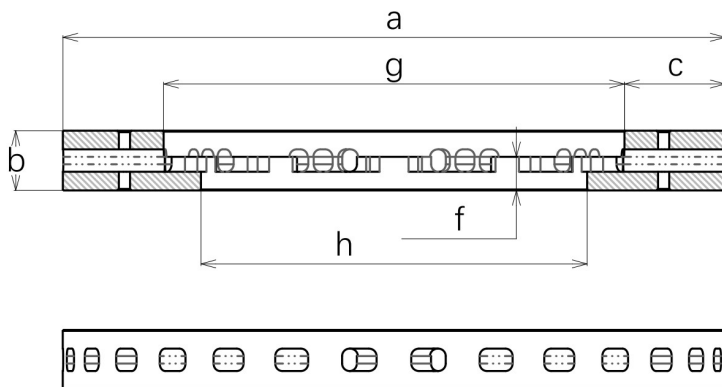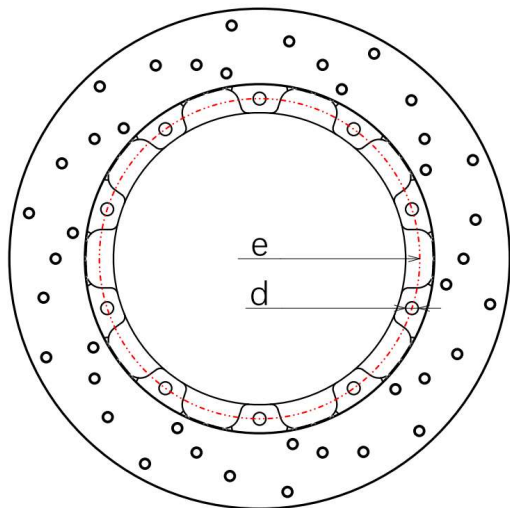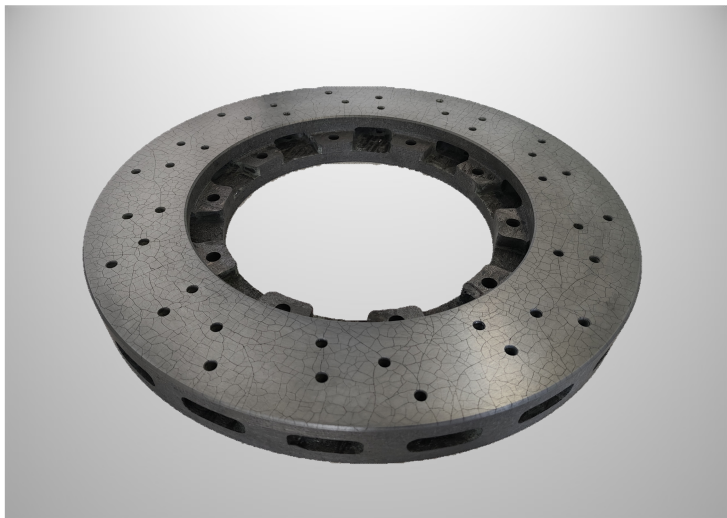

产品型号 products	外径 a (mm)	厚度 b (mm)	刹宽 c (mm)	装配孔直径 d (mm)	节圆直径 e (mm)	台阶厚度 f (mm)	摩擦面内径 g (mm)	盘体内径 h (mm)	参考重量 (kg)
400X28D58	400	28	58	9	264	18	284	244	3.79
400X36D72	400	36	72	9	236	23	256	216	5.59
400X36D90	400	36	90	9	200	23	220	180	6.45
405X34D62	405	34	62	9	261	23	281	241	4.84
405X34D72	405	34	72	9	241	23	261	221	5.34






41x系列制动盘

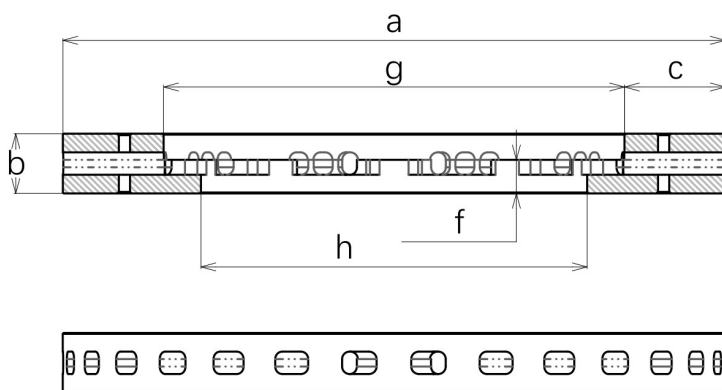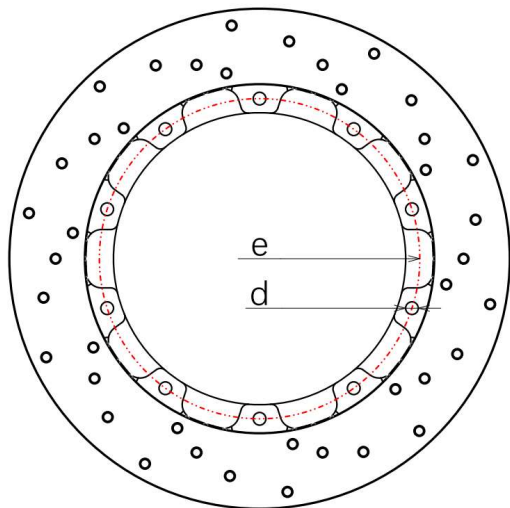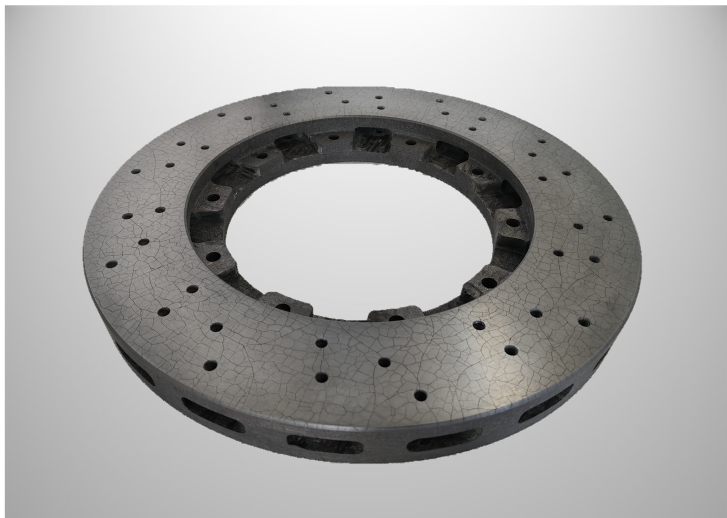

产品型号 products	外径 a (mm)	厚度 b (mm)	刹宽 c (mm)	装配孔直径 d (mm)	节圆直径 e (mm)	台阶厚度 f (mm)	摩擦面内径 g (mm)	盘体内径 h (mm)	参考重量 (kg)
410X32D68	410	32	68	9	254	18	274	234	4.80
410X36D72	410	36	72	9	246	23	266	226	5.77
410X36D78	410	36	78	9	237	23	252	212	6.11






42x系列制动盘

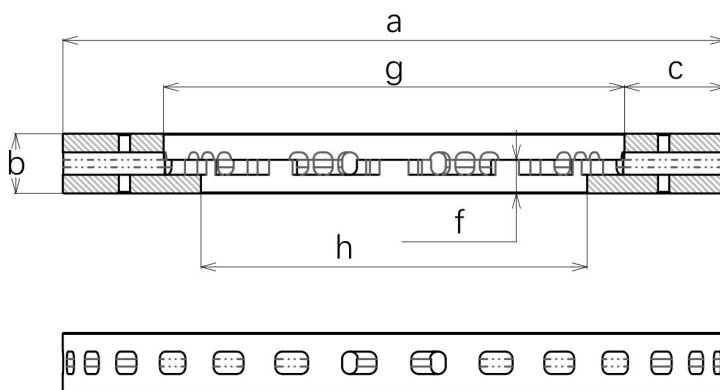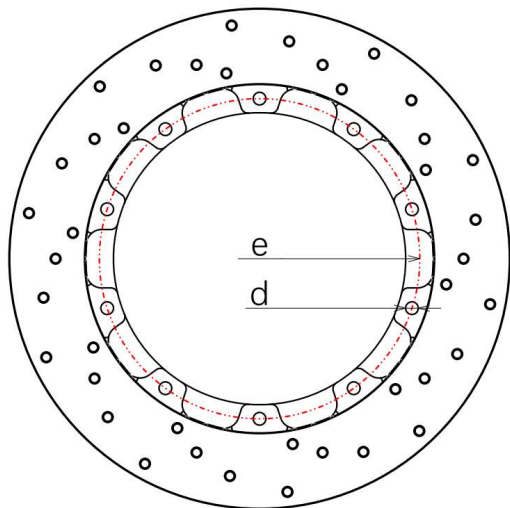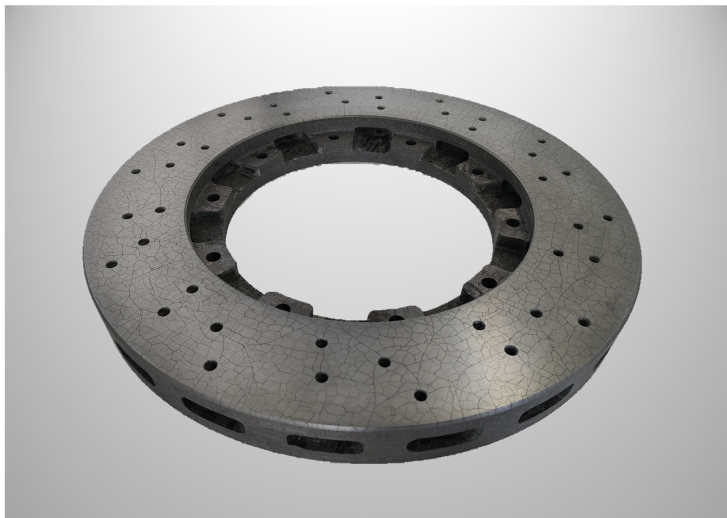



产品型号 products	外径 a (mm)	厚度 b (mm)	刹宽 c (mm)	装配孔直径 d (mm)	节圆直径 e (mm)	台阶厚度 f (mm)	摩擦面内径 g (mm)	盘体内径 h (mm)	参考重量 (kg)
420X40D101	420	40	101	9	198	23	218	178	8.09



44x系列制动盘

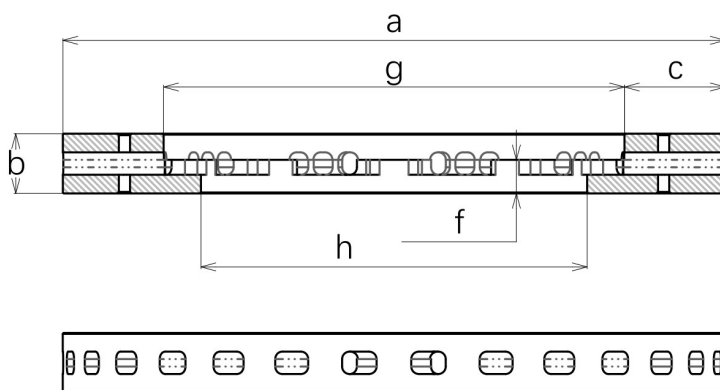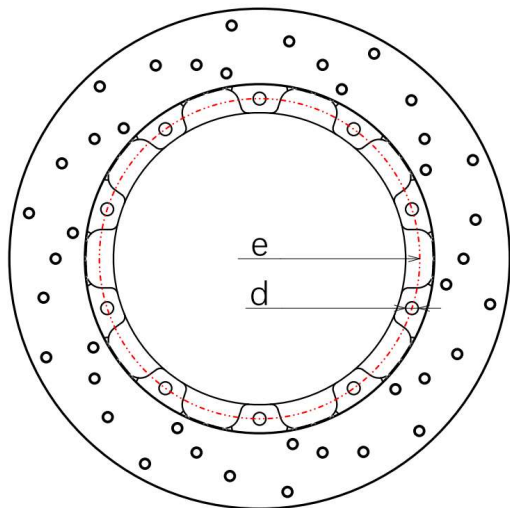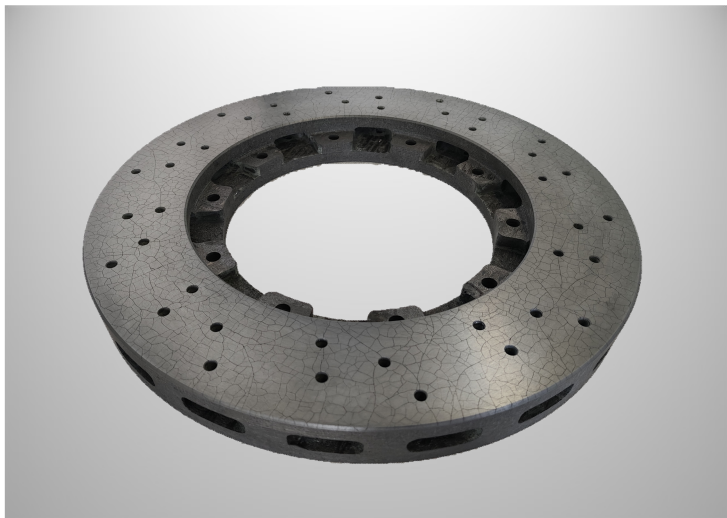

产品型号 products	外径 a (mm)	厚度 b (mm)	刹宽 c (mm)	装配孔直径 d (mm)	节圆直径 e (mm)	台阶厚度 f (mm)	摩擦面内径 g (mm)	盘体内径 h (mm)	参考重量 (kg)
440X40D101	440	40	101	9	218	23	238	198	8.62

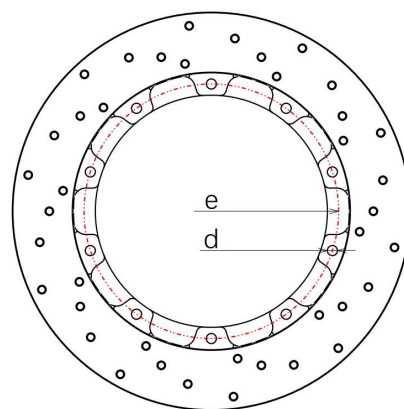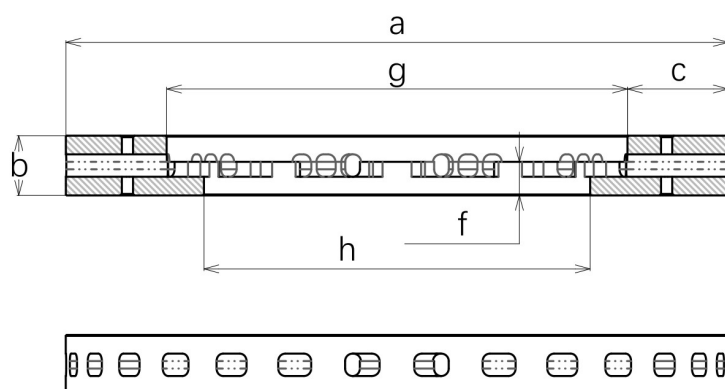

总览 Overview

产品型号 products	外径 Diameter 'a' (mm)	厚度 Thickness 'b' (mm)	刹宽 Width 'c' (mm)	装配孔直径 Diameter 'd' (mm)	节圆直径 P.C.D 'e' (mm)	台阶厚度 Thickness 'f' (mm)	摩擦面内径 Diameter 'g' (mm)	盘体内径 Diameter 'h' (mm)	参考重量 weight (kg)
350X32D65	350	32	65	9	200	18	220	180	3.82
355X28D54	355	28	54	9	227	18	247	207	3.15
355X32D54	355	32	54	9	227	18	247	207	3.44
355X32D62	355	32	62	9	211	18	231	191	3.78
355X32D67	355	32	67	9	201	18	221	181	3.97
360X26D55	360	26	55	9	230	18	250	210	2.98
360X26D69	360	26	69	9	202	18	222	182	3.45
360X32D64	360	32	64	9	212	18	232	192	3.92
370X24D68	370	24	68	9	214	17	234	194	3.30
370X30D72	370	30	72	9	206	18	226	186	4.22
378X36D56	378	36	56	9	246	23	266	226	4.41
380X28D54	380	28	54	9	252	18	272	232	3.40
380X28D57	380	28	57	9	246	18	266	226	3.53
380X28D61	380	28	61	9	238	18	258	218	0.00
380X28D68	380	28	68	9	224	18	244	204	0.00
380X30D60	380	30	60	9	240	18	260	220	3.87
380X32D56	380	32	56	9	248	18	268	228	3.83
380X34D64	380	34	64	9	232	23	252	212	0.00
380X34D72	380	34	72	9	216	23	236	196	4.93
380X34D80	380	34	80	9	202	23	220	180	0.00
380X36D72	380	36	72	9	216	23	236	196	5.24
380X36D80	380	36	80	9	200	23	220	180	0.00
390X32D68	390	32	68	9	234	18	254	214	4.51
390X36D72	390	36	72	9	226	23	246	206	5.43
393X36D88	393	36	88	9	197	23	217	177	6.21
400X28D58	400	28	58	9	264	18	284	244	3.79
400X36D72	400	36	72	9	236	23	256	216	5.59
400X36D90	400	36	90	9	200	23	220	180	6.45
405X34D62	405	34	62	9	261	23	281	241	4.84
405X34D72	405	34	72	9	241	23	261	221	5.34
410X32D68	410	32	68	9	254	18	274	234	4.80
410X36D72	410	36	72	9	246	23	266	226	5.77
410X36D78	410	36	78	9	237	23	252	212	6.11
420X40D101	420	40	101	9	198	23	218	178	8.09
440X40D101	440	40	101	9	218	23	238	198	8.62



KING CARBON
composites
理想 / 创新 / 远见